

# Solar Energy as a Primary Source of Energy for a Cloud Server

Zuzana Priščáková<sup>1)</sup>, Ivana Rábová<sup>2)</sup>

Mendel University in Brno, Faculty of Business and Economics, Department of Informatics, Zemědělská 1,  
602 00 Brno, Czech Republic, ui.pefka.mendelu.cz

1) [zuzana.priscakova@hotmail.com](mailto:zuzana.priscakova@hotmail.com)

2) [rabova@mendelu.cz](mailto:rabova@mendelu.cz)

**Abstract** — Cloud Computing is a modern innovative technology for solution of a problem with data storage, data processing, company infrastructure building and so on. Many companies worry over the changes by the implementation of this solution because these changes could have a negative impact on the company, or, in the case of establishment of a new companies, this worry results from an unfamiliar environment. The aim of this paper is to offer and scientifically confirm a proposal of an accessibility solution of cloud by implementing of solar energy as a primary source.

**Keywords** — Cloud Computing, data accessibility, solar energy.

## I. INTRODUCTION

Cloud Computing belongs to modern trends in the field of information technology. Under the term cloud we can really imagine a cloud full of data. Every day we use the technology of cloud without realising that our data are not saved in a particular place but in abstraction. The aim of this technology is to offer services, applications saved in cloud providers' servers. The only condition of data accessibility is internet access. We can access data whenever and wherever. The access may be also enabled by a web browser. As we have already mentioned, cloud is a business model with disposal of disc capacity and high performance and server computing capacity with the use of virtualisation. Gartner has defined cloud computing as a style of computing where IT is scalable and flexible with support of delivering as a service with the help of information technology [1].

Cloud Computing can be created either by a computer, when the virtualisation is gained, or by implementation to a server. The latter, i.e., the implementation to a server, is always chosen in the business environment. After installation and configuration of a chosen cloud computing model relevant applications are created for company purposes, employee accounts eventually, or the cloud will represent the data storage of the company. Increase of performance effectiveness is one of the possibilities after implementation of a cloud solution.

A cloud solution may carry some negatives like problems with data storage, security, or with data access. Security in cloud comes out its feature – multiplicity. Through the net we can connect to a relevant server where the user application may be found. Thanks to the application we get to data. Safety conditions are important by the work with data. Data integration, secrecy, and accessibility belong here. Data integrity ensures that data

are not duplicated. Authentication codes, which are assigned after data coding, are used by integrity. By coding by the means of keys, the principles of cryptography are used. The last condition is accessibility. This term denotes realisation of server connection to a source of energy. The current solution is dependence on the mains. By power failure data may be partially or completely lost, and data access and the access to the application saved in cloud may be denied. It is a small problem with a great impact on our work.

The use of alternative sources of energy is one of the accessibility solutions. The Sun is one of the most important sources of energy. Solar energy originates deeply in the core of the Sun. The temperature (15 000 000 °C; 27 000 000 °F) and the pressure (340 times higher than that at the sea level) are so intense that nuclear fusion reactions occur [2]. The Sun belongs to inexhaustible energy sources and it belongs to the group of energy sources with no negative impact to the environment.

When solar radiation passes through the Earth's atmosphere, its intensity decreases gradually. Three kinds of radiation hit the Earth (direct, diffuse, and reflected – Fig.1). Direct radiation gains a lower rate of luminosity than other radiations. Diffuse radiation originates from the distraction and reflection from the Earth's surface.

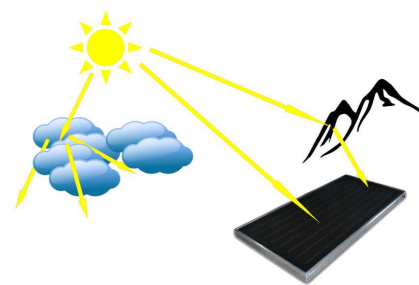


Fig. 1: Types of solar radiation

The solar electric system serves to collect radiation. The higher costs by its implementation will be returned when the system is used for a certain period, i.e., energetic amortization. Regarding the long term durability of solar panels and lower energetic costs for their production, solar panels are considered to be a source with long energetic returnability. Unfortunately, solar systems cannot work without an additional source since in the conditions of Central Europe they are not able to generate

their whole consumption in an economically effective way [3].

When the intensity of luminosity is lower during the day (at the night), the solar panel does not generate energy, therefore it is necessary to use a secondary energy source. In this case, the use of another alternative low-cost energy source (water energy, wind energy) would be complicated regarding the external forcing of the climate in the given locality. A solution could be found in the use of energy produced and stored in accumulators during the day, eventually in a combination of solar energy and connection to the mains.

## II. BASIC FACTS

When calculating the amount of solar energy reaching  $1 \text{ m}^2$  of the Earth, we rely on essentials of physics. The Earth revolves around the Sun in an elliptical path. The Sun is right in a focus of the Earth's path. Since the trajectory of the Earth revolving has the shape of an ellipse, it is necessary to count on the change of the distance between the Earth and the Sun. When passing through the atmosphere, intensity of sun rays is getting lower. A total luminous flux is called luminosity  $L_{\odot}$  [4]. We can calculate the radiation intensity on the basis of the relation between luminosity and the distance of the Earth from the focus. It is important to notice that within the relation to the Sun, the Earth can be in two positions. Perihelion (P) is the position when the Earth is nearest to the Sun. Aphelion (A) is the position when the Earth is farthest from the Sun. The days when the Earth is in these two positions are called solstices. The distance which changes depending on the trajectory could be conveyed in a calculation of eccentricity ( $e$ ) with respect to the constants mentioned so far [5].

To adapt the model to the real conditions, it is necessary to count on the angle formed by the connection of a random point in the trajectory of the Earth with the Sun and by the connection of the Sun and the Earth when it is in perihelion. This angle is marked with a Greek sign  $\phi$  in Fig.2.

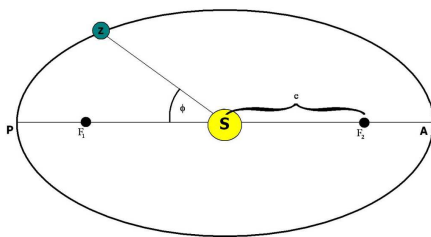


Fig. 2: The trajectory of the Earth around the Sun

A direct sun ray passes through the atmosphere when hitting the Earth's surface. Clouds bend the solar radiation and that leads to light scattering. Refraction is described by Snell's law [6]. In two different media the ratio of the sine of the angle of incidence to sine of the angle of refraction is called relative refractive index. Two types of refraction are known depending on the density of the media. If the ray of light travels from the medium with an optically lower density to the medium with an optically greater density, light will refract away from the perpendicular. Otherwise, light will refract towards the

perpendicular. When calculating diffuse radiation on the Earth, we have to consider the aspect that rays of light hit a surface that is heterogeneous. The Earth's surface consists of land, oceans, and water areas. When reaching land, sun rays reflect from mountains and one part of diffuse radiation originates this way. Oceans and water areas evaporate, vapor originates and this phenomenon is related to diffuse resistance regarding the medium. The air has the lowest diffuse resistance.

It is very important to include also the angle of solar panel tilt by diffuse radiation. In the vertical position the collector is tilted. The radiation reaching the area of the panel is just partial. The most energy is generated by a horizontal position of the collector. The angle of tilt is null so the solar panel area is fully available for collecting diffuse radiation.

## III. SUGGESTION FOR SOLUTION

Calculations are based on the rate of the Sun's luminosity  $L_{\odot} = 3,842 \times 10^{26} \text{ W}$  [7]. The intensity of solar radiation is marked with a sign  $I_0$ . When we want to express the intensity mathematically, it is necessary to include a relation between the positions of the Earth and the Sun, marked as the distance  $r$ , to the equation. The rate of solar radiation intensity is in direct proportion to the Sun's luminosity and in inverse proportion to the change of the distance between the Sun and the Earth.

$$I_0(r) = \frac{L_{\odot}}{4\pi r^2} \quad (1)$$

The distance is considered as a constant in this equation but this is not correct. The Earth revolves around the Sun in an elliptical path. In terms of this ellipse, the Earth comes to the points of equinox and the ellipse has two focuses. The distance between the focus and the centre of the ellipse is defined by the rate of ellipse eccentricity  $\epsilon$ . This may be conveyed by a simple equation  $\epsilon = \sqrt{a^2 - b^2}$  (2). When the change of the distance between the Sun and the centre of the ellipse is conveyed, it is possible to convey the distance between the Earth and the Sun. Here it is necessary to include also the distance by equinox marked as  $r_0$ . This distance is in direct proportion to the distance between the Earth and the Sun regarding the angle  $\phi$ . The angle  $\phi$  is in inverse proportion to the sidereal year, i.e., the time taken by the Earth to orbit the Sun once with respect to the fixed stars. The time taken from the moment when the Earth crosses the point of equinox to the given point on its trajectory is related to the angle  $\phi$  and it is marked by a letter  $t$ , resulting in the relation:

$$r(\phi) = \frac{r_0}{1 + \epsilon \cos \phi} \quad (3)$$

The dependence of eccentricity on the distance is visible in this relation. Let's expand the formula for eccentricity by application of knowledge about two focuses of an ellipse. In this case, these focuses are called perihelion and aphelion. After converting the equation, we get two equations to calculate the distance in both focuses of the ellipse.

Let's go back to the beginning and let's apply given formulas to the basic formula for the calculation of the Sun's intensity.

$$\begin{aligned} r_{\text{apohelium}} &= \frac{r_0}{1-\varepsilon}, \\ r_{\text{perihelium}} &= \frac{r_0}{1+\varepsilon} \end{aligned} \quad (4)$$

The given relation is valid when a solar collector is placed in a horizontal level since it is the most effective way of solar radiation utilisation.

$$I_0(r) = \frac{L_{\square}}{4\pi r^2} = \frac{L_{\square}}{4\pi r_0^2} (1 + \varepsilon \cos \phi)^2 = \frac{L_{\square}}{4\pi r_0^2} (1 + 2\varepsilon \cos \phi) \quad (5)$$

Besides direct radiation, a solar collector is hit by diffuse radiation. When the collector is placed horizontally, this radiation is in direct proportion to direct radiation. It is necessary to include external impacts of scattering, so the constant of the diffuse factor  $\mu$  has to be used.

$$I_d = I_0 \mu \quad (6)$$

The constant of the diffuse factor can be calculated from the relation:

$$\mu = 0,095 + 0,04 \sin \left[ (360/365) \cdot (t - 100) \right] \quad (7)$$

When these two types of radiation are applied, the relation for calculation of total solar radiation during a clear day in  $W/m^2$  is

$$I = I_0 + I_d \quad (8)$$

It is possible to calculate total solar radiation reaching  $1 m^2$  from the formula but it is not possible to determine what area a solar collector in a horizontal position should have to generate the amount of energy that is necessary for consumption of a server per day. To determine the maximum energy consumption of a server in conditions of a medium-sized company, an IT company was addressed. On the basis of its experience the load 2.5 kW per day was determined.

In the case of horizontal position of the collector it is very important to realise that the tilt is null. Sun rays reach the area of the collector directly. The calculation of the area of the collector depends on the particular kind of solar collectors. The effective area of the absorber, marked as  $S_a$ , and the useful power output of the collector are important parameters. The constant  $S_a$  is defined by a producer. The useful power output is sometimes defined but it is possible to convey it by energetic effectiveness  $\eta$  and by the amount of energy reaching the collector, i.e.,  $I$ .

$$Q_u = I \eta \quad (9)$$

A total area of collectors  $S$  can be calculated as a ratio of the load per day to the useful power output of the collector.

$$S = \frac{Q_z}{Q_u} \quad (10)$$

Besides the area of collectors, it is necessary to calculate the number of collectors, marked as  $n$ .

$$n = \frac{S}{S_a} \quad (11)$$

It is obvious by the load per day that more collectors will be needed for the realisation. The number depends on collector power. In this case it is not specified as the use of a solar power system but as the use of an island solar power system and maybe the term a net solar power plant would be suitable. As a suggestion of solution we offer the use of solar power plant with 14 solar panels with efficiency 230 Wp and one photovoltaic inverter. A project by a certificated expert, permission, and licences are needed to use the plant. A switchboard with protection is necessary to connect the plant to the grid.

#### IV. CONCLUSION

The use of the technology of virtualisation and the cloud solution creation for companies is an up-to-date solution of the work with data. Despite of advantages, cloud computing has brought also troubles that have not been solved yet. Data security is considered as one of the basic troubles. Data integration, data secrecy, and accessibility belong here. Since this innovative technology is dependent on a source of energy, its accessibility depends on electricity. A modern solution of cloud computing implementation on a server is influenced by the connection of a server to the mains. In the case of power failure the access to the system is not possible, or data may be lost or stolen. The use of alternative sources of energy instead of the mains is one of possible solutions of this problem and solar energy, which is often used today, offers such possibilities.

Solar energy is considered as one of the most ecological solutions of power dependence. The source of this energy is the Sun. The Earth revolves around the Sun in an elliptical path and the Sun is in one of two focuses of this ellipse. Perihelion, the nearest, and aphelion, the farthest, are two most interesting points on the trajectory of the Earth around the Sun. The distance between the Earth and the Sun affects the intensity of solar radiation that reaches the Earth's surface. Before reaching the Earth, sun rays pass through the atmosphere so the intensity of radiation is lower. Besides direct sun rays, diffuse rays reach the Earth. These rays are reflected from the Earth's surface, clouds, or water vapour above the water areas and oceans. Light scattering occurs on the basis of light refraction, described by the Snell's law. When the intensity of sun rays reaching the Earth is being calculated, it is necessary to consider the angle between the Earth and the Sun. Total solar radiation reaching the Earth may be calculated as addition of all types of solar radiation. Solar collectors serve to utilise solar radiation. The purpose is to collect as many sun rays as possible and transform them to solar energy. Solar radiation collecting is most effective when the solar collector is in a horizontal position. Rays hit the absorbing area of the collector each sun hour available per day. A large number of collectors are needed to generate

electricity necessary for a correct work of a server. A total area of collectors may be calculated with a respect to the useful power output of the collector and the effective absorbing area. The number of collectors depends on the total area of collectors. When a larger number of collectors are used, we call it an island solar electric system. However, this term is not correct in this case. A solar power plant originates when solar energy is used as an energy source. We offer the use of 14 collectors with power 230 Wp as one possibility. Before the realisation, it is necessary to consider not only the expenses for solar techniques but also licences, a project, and confirmations for the work of the plant. Initial investment will be returned in a few years and regarding the long term durability of the solar power plant, this solution becomes interesting for medium-sized companies, eg. various daughter companies like Kongsberg Automotive (Vráble, Slovak Republic), Lear Corporation (Vyškov, Czech Republic), Tyco Electronics (Kuřim, Czech Republic).

## REFERENCES

- [1] Gartner, *IT Glossary – defining in IT industry*, 2012. [Online]. Available: <http://www.gartner.com/it-glossary/cloud-computing/> [Accessed: 12 Oct. 2012].
- [2] C. J. Hamilton, *Views of the solar system*, 2012. [Online]. Available: <http://www.solarviews.com/eng/sun.htm> [Accessed: 5 Oct. 2012].
- [3] I. Iliaš, K. Guschlbauer-Hronek, B. Benesch, G. Bayer, *Slnko k službám: Možnosti využívania slnečnej energie*, Energetické centrum Bratislava, Phare, 2006.
- [4] M. S. Keil, *Gradient representations and the perception of luminosity*, Vision Research, December 2007.
- [5] L.A. McFadden, P. Weissman, T. Johnson, *Encyclopedia of the Solar System (Second Edition)*, New York: Academic Press, 2007.
- [6] R.J. Schechter, *Snell's law: Optimum pathway analysis*, Survey of Ophthalmology, June 2010.
- [7] S. Gil, M. Mayochi, L. J. Pellizza, *Experimental estimation of the luminosity of the Sun*, Física re-Creativa, 10 March 2009. [Online]. Available: [http://www.fisicarecreativa.com/papers\\_sg/papers\\_sgil/Docencia/luminosity\\_sun\\_2k6.pdf](http://www.fisicarecreativa.com/papers_sg/papers_sgil/Docencia/luminosity_sun_2k6.pdf) [Accessed: 15 Oct. 2012].