

FIRE DESIGN OF STEEL BEAMS WITH SLENDER CROSS-SECTION

The influence of loading

Carlos Couto^a, Paulo Vila Real^a, Nuno Lopes^a and Bin Zhao^b

^aRISCO –Department of Civil Engineering, University of Aveiro, Portugal

^bCTICM - Centre Technique Industriel de la Construction Métallique, Paris, France

Abstract

The present paper addresses the study of laterally unrestrained steel beams with slender cross-sections for the case of fire with special focus on the influence of loading. A numerical investigation of several beams submitted to triangular and bi-triangular end-moment distribution and uniformly distributed loads is carried out at elevated temperatures using shell finite elements. The results are compared with the existing simplified beam design rules of Part 1.2 of Eurocode 3 and recent developments on the subject, as well as the utilization of the factor “ f ” which was developed to take into account the non-uniform bending diagrams but for stocky cross-sections (Class 1 and 2).

Keywords: Lateral torsional buckling (LTB), beams, class 4, fire, non-uniform bending

1 INTRODUCTION

The rules of EN1993-1-2 (CEN 2005) for designing laterally unrestrained beams with slender cross-sections for the case of fire demonstrated to be very conservative (Couto et al. 2015a). This work was carried out within the European Research Project FIDESC4 (FIDESC4 2014) that has been funded by RFCS in order to improve this undesirable situation. In the referenced work, new design rules to assess the load bearing capacity of laterally unrestrained beams subjected to uniform bending moments were proposed based on an effective section factor that takes into account the interaction between local buckling and lateral-torsional buckling (LTB), which was identified as the main physical phenomena that influence the collapse of laterally unrestrained beams with slender cross-sections in case of fire. Herein, this new proposal is presented and its scope of application is expanded to take different loading cases into account, such as, triangular and bi-triangular bending moments and uniformly distributed loads. The consideration of factor “ f ” that was developed for Class 1 and 2 beams (Vila Real et al. 2007; Lopes et al. 2010) is investigated to account for the influence of non-uniform bending diagrams in the resistance of beams with slender cross-sections against lateral-torsional buckling at elevated temperatures. Comparison with existing beam design rules of EN1993-1-2 is also performed and also with the consideration of factor “ f ”.

An extensive numerical study is carried with GMNIA analysis at elevated temperatures using the software SAFIR (Franssen, 2005). Several cross-sections are considered as well as different temperatures. Comparisons, between numerical results and the simplified design rules to account for the influence of the loading, demonstrate a considerable improvement on the results leading to more accurate and, thus, economical fire design.

3.1 Design methods for beams with slender cross-sections in fire situation

The lateral-torsional buckling resistance of a beam with slender cross-section is evaluated in fire situation according to EN1993-1-2 with the following expression

$$M_{b,fi,t,Rd} = \chi_{LT,fi} M_{fi,,Rd} / \chi_{M,fi} \quad (1)$$

where $M_{fi,Rd}$ is the design moment resistance of the cross-section for a uniform temperature and $\chi_{M,fi}$ is the partial safety factor for fire situation. The reduction factor for LTB in the fire design situation is determined by

$$t_{LT,fi} = \frac{1}{W_{LT,fi} + \sqrt{W_{LT,fi}^2 - \bar{\chi}_{LT,fi}^2}} \quad (2)$$

where $\bar{\chi}_{LT,fi}$ is the non-dimensional slenderness and $W_{LT,fi}$ is the imperfection factor.

The imperfection factor is calculated as

$$W_{LT,fi} = 0.5 \left[1 + r_{LT} (\bar{\chi}_{LT,fi} - \bar{\chi}_{LT,0}) + \bar{\chi}_{LT,fi}^2 \right] \quad (3)$$

with the values of r_{LT} and $\bar{\chi}_{LT,0}$ given in Table 1 defining the EN1993-1-2 design curve and the three curves (L1, L2 and L3) proposed in (Couto et al. 2015a), see Fig. 1. Curves L1-L3 depend on the effective section factor $W_{eff,y}/W_{el,y}$ and the limits for its selection are also given in this table.

Table 1 Parameters for the design curves for beams with slender cross-sections.

Case	Curve	Limits	r_{LT}	$\bar{\chi}_{LT,0}$
1	EN1993-1-2	Not applicable	$0.65v = 0.65\sqrt{235/f_y}$	0.0 (no plateau)
2	New proposal - L1	$W_{eff,y}/W_{el,y} > 0.9$	$1.25v = 1.25\sqrt{235/f_y}$	0.2
3	New proposal - L2	$0.8 < W_{eff,y}/W_{el,y} \leq 0.9$	$1.00v = 1.00\sqrt{235/f_y}$	0.2
4	New proposal - L3	$W_{eff,y}/W_{el,y} \leq 0.8$	$0.75v = 0.75\sqrt{235/f_y}$	0.2

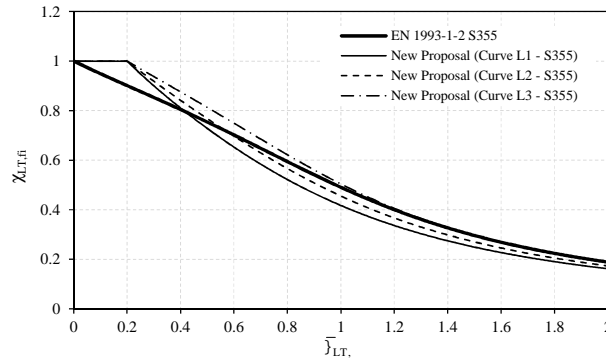


Fig. 1 Design curves for laterally unrestrained beams with slender cross-sections at elevated temperatures.

As mentioned in the introduction, in order to account with the non-uniform bending diagram, the factor “ f ” may be used. In case of fire this factor is defined as

$$f = 1 - 0.5(1 - k_c) \quad (4)$$

where k_c is a correction factor that depends on the moment distribution, and for beam submitted to end moments is given by

$$k_c = 0.6 + 0.3\Xi + 0.15\Xi^2 \text{ but } k_c \leq 1 \quad (5)$$

and for a beam submitted to uniformly distributed load $k_c = 0.91$. Finally, the reduction factor to take lateral-torsional buckling into account is calculated as

$$t_{LT,fi,mod} = \frac{t_{LT,fi}}{f} \quad (6)$$

3 RESULTS

Figures 3-5, show the comparison between the numerical results and the beam design curves of Table 1. When used, the factor “ f ” is calculated with $t_{LT,fi,mod}$ from Eq. (6).

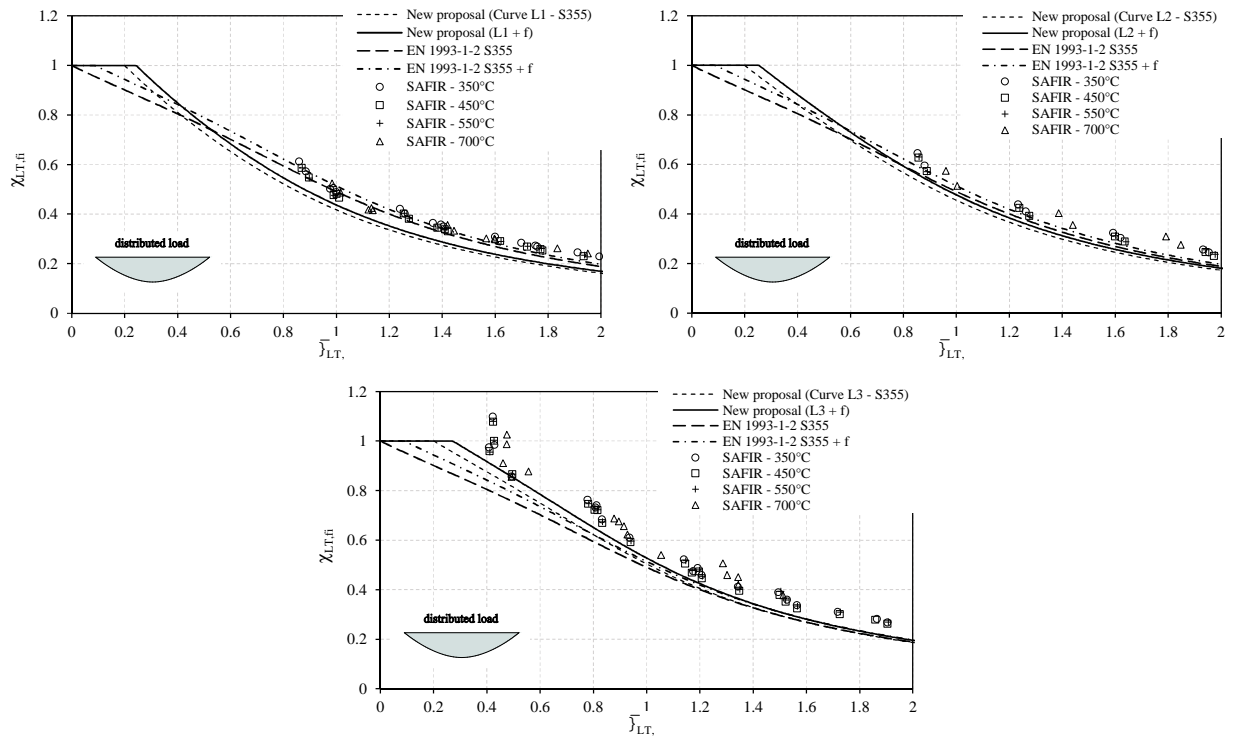


Fig. 3 Comparison of the numerical results with the LTB design curves for distributed load.

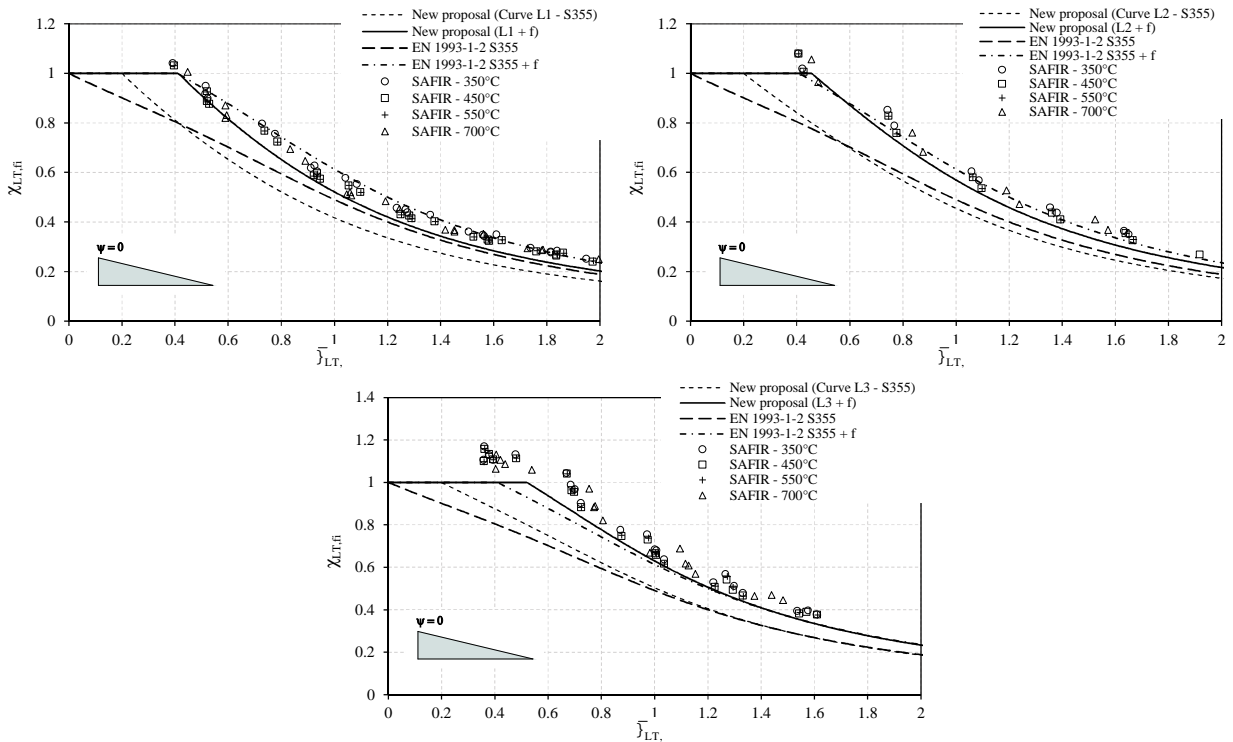


Fig. 4 Comparison of the numerical results with the LTB design curves for triangular bending diagram.

For both loading cases, it is observed that the inclusion of the factor “ f ” gives better prediction of the beam resistance when used togetherwith the proposed L1-L3 design curves.

For the bi-triangular case (Fig.5), it is noticed that the proposed curve does not fit the numerical results when using the factor “ f ” and several results lay on the unsafe side. In this case, it is observed that for slender cross-sections the interaction between local buckling and lateral-torsional buckling does not allow reaching the beam resistance as predicted by the factor “ f ” that was initial developed for Class 1 and 2 cross-sections. For that reason, it is proposed to use a limitation on the factor “ f ” to account with this. Accordingly, this factor should be given by

$$f = 1 - 0.5(1 - k_c) \text{ but } f \geq 0.8 \quad (7)$$

As it can be seen in the Fig.5, the proposed limitation to factor “ f ” leads to better prediction of the beam resistance and almost all numerical results are now on the safe side. In terms of the EN1993-1-2 beam design curve it is observed that it yields very safe results for all the loading cases but when using the factor “ f ” inconsistent results are obtained and a considerable amount of unsafe results appear (see also Table 3).

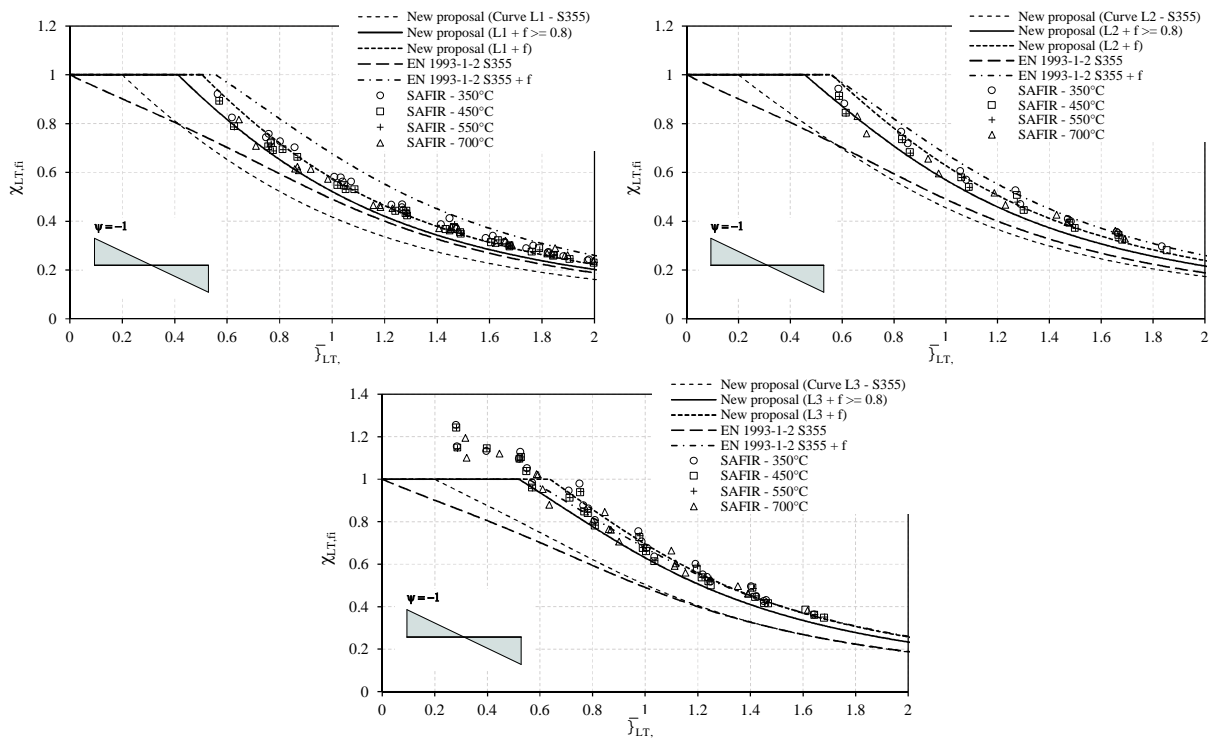


Fig. 5 Comparison of the numerical results with the LTB design curves for bi-triangular bending diagram.

3 STATISTICAL EVALUATION

The statistical results obtained for different curves are presented in Table 2. Although not plotted in the Figs. 3-5, the LTB design curve of EN1993-1-2 and using the limitation to factor “ f ” given by equation (7) was also considered in this table.

Table 3 Statistical results of beams submitted to non-uniform bending diagrams.

Case	LTB design curve	N Cases	Average	StdDev	Max.Unsafe	% Unsafe
i	EN1993-1-2	687	0.80	7.70%	1.04	1.46%
ii	EN1993-1-2 + f (equation 6)		0.99	11.02%	1.26	42.07%
iii	EN1993-1-2 + $f \geq 0.8$ (equation 7)		0.95	8.49%	1.15	30.42%
iv	New proposal		0.76	6.28%	n.a.	0.00%
v	New proposal + f (equation 6)		0.93	8.56%	1.18	19.21%
vi	New proposal + $f \geq 0.8$ (equation 7)		0.90	6.22%	1.07	4.80%

It is observed that both the EN1993-1-2 and new proposal (cases i and iv) are too much conservative (average values of 0.80 and 0.76) with the new proposal being always safe sided. Considering factor “ f ” from Eq. 6 (cases ii and v) the results now yield an average value of 0.99 for the EN1993-1-2 design curve and 0.93 for both cases, however a significant amount of unsafe results appear, respectively 42.07% and 19.21% for the EN1993-1-2 and new proposal, with a maximum 1.26 and 1.18. As it was mentioned in section 3, the factor “ f ” seems not to be adequate for bi-triangular bending diagram ($\xi = -1$). Finally, considering a limitation on the factor $f \geq 0.8$ (case iii and vi), there is some improvement on the results, but for the EN1993-1-2 still too many unsafe results exist (30.42%). With this limitation, the new proposal yields an average value of 0.90 with just 4.80% unsafe results and a maximum of 1.07.

5 CONCLUSIONS

In this work, the behaviour of beams with slender cross-sections submitted to non-uniform diagrams was numerically investigated in fire situation.

Comparison between the numerical results and the design methods of EN1993-1-2 with the respective buckling curve show that is mainly conservative for non-uniform bending diagrams but using the factor “ f ” gives a large amount of results that lay on the unsafe side. The proposed design curves L1, L2 and L3 also demonstrated to be very conservative for non-uniform bending diagrams. In this case, the use of factor “ f ” lead to improved results, however for the bi-triangular bending diagram it was also observed some unsafe results. Therefore it was proposed to use a limitation to this factor.

Finally, it was concluded that the proposed design curves (L1, L2 and L3) together with a factor “ f ” limited to 0.8 could be used to design beams with slender cross-sections submitted to non-uniform bending diagram in fire situation.

ACKNOWLEDGMENTS

The work in this paper was supported by the European Commission, Research Fund for Coal and Steel in the frame of the research project “FIDESC4 - Fire Design of Steel Members with Welded or Hot-rolled Class 4 Cross-sections”, Grant Agreement Number RFSR-CT-2011-00030.

REFERENCES

- CEN, 2005. EN 1993-1-2, Eurocode 3: Design of steel structures - Part 1-2: General rules - Structural fire design.
- Couto, C., Vila Real, P., Lopes, N., Zhao, B., 2015a. Numerical investigation of the lateral-torsional buckling of beams with slender cross sections for the case of fire. *submitted to Engineering Structures*.
- Couto, C., Vila Real, P., Lopes, N., Zhao, B., 2015b. Resistance of steel cross-sections with local buckling at elevated temperatures. *Journal of Constructional Steel Research*, 109, pp.101–114.
- FIDESC4, 2014. *Fire Design of Steel Members with Welded or Hot-Rolled Class 4 Cross-Section, RFCS-CT-2011-00030, 2011-2014*.
- Franssen, J.-M., 2005. SAFIR, A Thermal/Structural Program Modelling Structures under Fire. *Engineering Journal, A.I.S.C.*, 42(3), pp.143–158.
- Lopes, N., Vila Real, P., Simões da Silva, L., Franssen, J.-M., 2010. Lateral-torsional buckling on carbon steel and stainless steel beams with lateral loads plus end moments in case of fire. In *proceedings of the 6th International Conference on Structures in Fire SiF'10*. East Lansing, Michigan.
- Vila Real, P.M.M., Lopes, N., Simões da Silva, L., Franssen, J.-M., 2007. Parametric analysis of the lateral-torsional buckling resistance of steel beams in case of fire. *Fire Safety Journal*, 42(6-7), pp.416–424.